
POLYvalley 1100M-26/112 Corrugated sheet

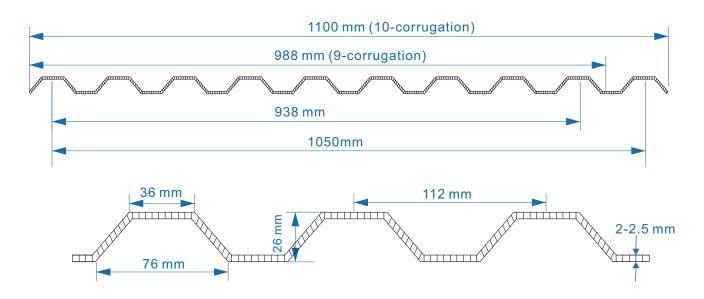

DESCREPTION=

Made by 100% virgin Bayer material and 50 micro-meter UV layer, Polyvalley multi-wall corrugated sheet offers ten-year quality warranty against breakage and yellowing. It adopts two-wall R structure and can get very high light transmit (around 88%). With very small vertical bar distance, it can get a very good strength. And during installation, the connection part of two sheets can be overlapped perfectly to avoid water permeation.

Polyvalley offers many different kinds of corrugated sheets. Customized corrugation is also available. You are always welcomed to contact us for more information at any time.

TECHNICAL SPECIFICATION AND FEATURES	
THICKNESS:	2-2.5mm
TOTAL WIDTH:	1100mm±5
USEFUL WIDTH:	1050mm±5
WAVE HEIGHT:	26mm
WAVE PITCH:	112mm
END SEALING:	Hot melt sealing is possible
LIGHT TRANSMISSION:	Clear 85%±3; Opal 70%±3; Green 60%±3
THERMAL INSULATION:	U=4.5 W/m ² K
FLAMMABILITY:	B1
UV COATING:	50µm one side (two side is optional)
APPLICATION:	FLAT ROOF CURVED ROOF BENDING DIAMETER P. S.





ADD:No.2 Hongwang road Polyvalley technology park,


Wuqing Tianjin, China

TEL: (+86)-22-5967-2888 FAX: (+86)-22-5967-3666

Hotline: (+86)400 086 3628

Corrugated 1070M-23/146 DATASHEET

POLYvalley 1070M-23/146 Corrugated sheet

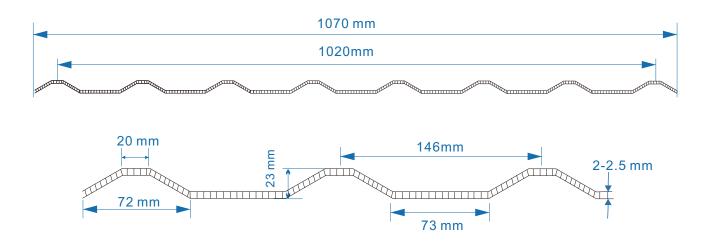

DESCREPTION=

Made by 100% virgin Bayer material and 50 micro-meter UV layer, Polyvalley multi-wall corrugated sheet offers ten-year quality warranty against breakage and yellowing. It adopts two-wall R structure and can get very high light transmit (around 88%). With very small vertical bar distance, it can get a very good strength. And during installation, the connection part of two sheets can be overlapped perfectly to avoid water permeation.

Polyvalley offers many different kinds of corrugated sheets. Customized corrugation is also available. You are always welcomed to contact us for more information at any time.

TECHNICAL SPECIFICATION AND FEATURES	
THICKNESS:	2-2.5mm
TOTAL WIDTH:	1070mm±5
USEFUL WIDTH:	1020mm±5
WAVE HEIGHT:	23mm
WAVE PITCH:	146mm
END SEALING:	Hot melt sealing is possible
LIGHT TRANSMISSION:	Clear 85%±3; Opal 70%±3; Green 60%±3
THERMAL INSULATION:	U=4.5 W/m ² K
FLAMMABILITY:	B1
UV COATING:	50µm one side (two side is optional)
APPLICATION:	FLAT ROOF CURVED ROOF BENDING DIAMETER P3.5.





ADD:No.2 Hongwang road Polyvalley technology park,


Wuqing Tianjin, China

TEL: (+86)-22-5967-2888 FAX: (+86)-22-5967-3666

Hotline: (+86)400 086 3628

Corrugated 1216M-18/76 DATASHEET

POLYvalley 1216M-18/76 Corrugated sheet

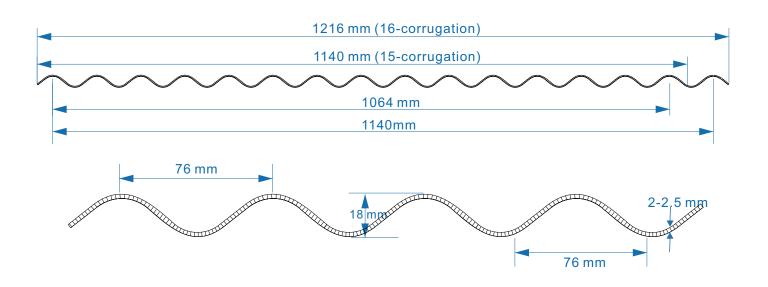

DESCREPTION

Made by 100% virgin Bayer material and 50 micro-meter UV layer, Polyvalley multi-wall corrugated sheet offers ten-year quality warranty against breakage and yellowing. It adopts two-wall R structure and can get very high light transmit (around 88%). With very small vertical bar distance, it can get a very good strength. And during installation, the connection part of two sheets can be overlapped perfectly to avoid water permeation.

Polyvalley offers many different kinds of corrugated sheets. Customized corrugation is also available. You are always welcomed to contact us for more information at any time.

TECHNICAL SPECIFICATION AND FEATURES	
THICKNESS:	2-2.5mm
TOTAL WIDTH:	1190mm±5
USEFUL WIDTH:	1114mm±5
WAVE HEIGHT:	18mm
WAVE PITCH:	76mm
END SEALING:	Hot melt sealing is possible
LIGHT TRANSMISSION:	Clear 85%±3; Opal 70%±3; Green 60%±3
THERMAL INSULATION:	U=4.5 W/m ² K
FLAMMABILITY:	B1
UV COATING:	50µm one side (two side is optional)
APPLICATION:	FLAT ROOF CURVED ROOF BENDING DIAMETER






ADD:No.2 Hongwang road Polyvalley technology park,

Wuqing Tianjin, China

TEL: (+86)-22-5967-2888 FAX: (+86)-22-5967-3666

Hotline: (+86)400 086 3628

POLYvalley 920M-57/177 Corrugated sheet

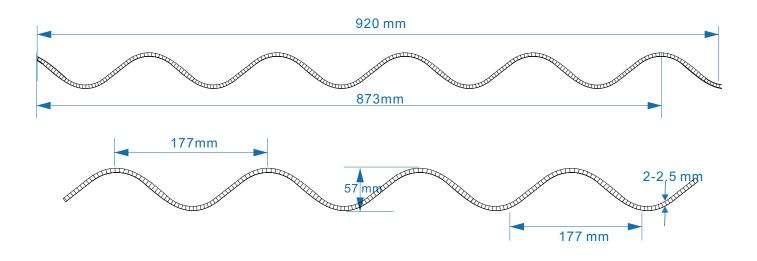

DESCREPTION

Made by 100% virgin Bayer material and 50 micro-meter UV layer, Polyvalley multi-wall corrugated sheet offers ten-year quality warranty against breakage and yellowing. It adopts two-wall R structure and can get very high light transmit (around 88%). With very small vertical bar distance, it can get a very good strength. And during installation, the connection part of two sheets can be overlapped perfectly to avoid water permeation.

Polyvalley offers many different kinds of corrugated sheets. Customized corrugation is also available. You are always welcomed to contact us for more information at any time.

TECHNICAL SPECIFICATION AND FEATURES	
THICKNESS:	2-2.5mm
TOTAL WIDTH:	920mm±5
USEFUL WIDTH:	873mm±5
WAVE HEIGHT:	57mm
WAVE PITCH:	177mm
END SEALING:	Hot melt sealing is possible
LIGHT TRANSMISSION:	Clear 85%±3; Opal 70%±3; Green 60%±3
THERMAL INSULATION:	U=4.5 W/m ² K
FLAMMABILITY:	B1
UV COATING:	50µm one side (two side is optional)
APPLICATION:	FLAT ROOF CURVED ROOF BENDING DIAMETER P. 3. 5.4






ADD:No.2 Hongwang road Polyvalley technology park,

Wuqing Tianjin, China

TEL: (+86)-22-5967-2888 FAX: (+86)-22-5967-3666

Hotline: (+86)400 086 3628

POLYvalley 1080M-28/203 Corrugated sheet

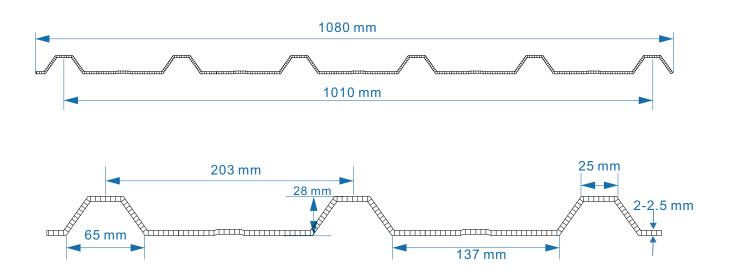

DESCREPTION

Made by 100% virgin Bayer material and 50 micro-meter UV layer, Polyvalley multi-wall corrugated sheet offers ten-year quality warranty against breakage and yellowing. It adopts two-wall R structure and can get very high light transmit (around 88%). With very small vertical bar distance, it can get a very good strength. And during installation, the connection part of two sheets can be overlapped perfectly to avoid water permeation.

Polyvalley offers many different kinds of corrugated sheets. Customized corrugation is also available. You are always welcomed to contact us for more information at any time.

TECHNICAL SPECIFICATION AND FEATURES	
THICKNESS:	2-2.5mm
TOTAL WIDTH:	1080mm±5
USEFUL WIDTH:	1010mm±5
WAVE HEIGHT:	28mm
WAVE PITCH:	203mm
END SEALING:	Hot melt sealing is possible
LIGHT TRANSMISSION:	Clear 85%±3; Opal 70%±3; Green 60%±3
THERMAL INSULATION:	U=4.5 W/m²K
FLAMMABILITY:	B1
UV COATING:	50µm one side (two side is optional)
APPLICATION:	FLAT ROOF CURVED ROOF BENDING DIAMETER P3.5M





ADD:No.2 Hongwang road Polyvalley technology park,


Wuqing Tianjin, China

TEL: (+86)-22-5967-2888 FAX: (+86)-22-5967-3666

Hotline: (+86)400 086 3628

Corrugated 1110M-28/210 DATASHEET

POLYvalley 1110M-28/210 Corrugated sheet

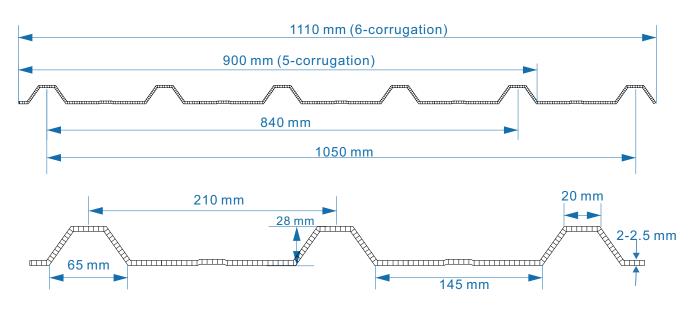

DESCREPTION

Made by 100% virgin Bayer material and 50 micro-meter UV layer, Polyvalley multi-wall corrugated sheet offers ten-year quality warranty against breakage and yellowing. It adopts two-wall R structure and can get very high light transmit (around 88%). With very small vertical bar distance, it can get a very good strength. And during installation, the connection part of two sheets can be overlapped perfectly to avoid water permeation.

Polyvalley offers many different kinds of corrugated sheets. Customized corrugation is also available. You are always welcomed to contact us for more information at any time.

TECHNICAL SPECIFICATION AND FEATURES	
THICKNESS:	2-2.5mm
TOTAL WIDTH:	1080mm±5
USEFUL WIDTH:	1010mm±5
WAVE HEIGHT:	28mm
WAVE PITCH:	210mm
END SEALING:	Hot melt sealing is possible
LIGHT TRANSMISSION:	Clear 85%±3; Opal 70%±3; Green 60%±3
THERMAL INSULATION:	U=4.5 W/m ² K
FLAMMABILITY:	B1
UV COATING:	50µm one side (two side is optional)
APPLICATION:	FLAT ROOF CURVED ROOF BENDING DIAMETER P. 3. 54.






ADD:No.2 Hongwang road Polyvalley technology park,

Wuqing Tianjin, China

TEL: (+86)-22-5967-2888 FAX: (+86)-22-5967-3666

Hotline: (+86)400 086 3628

POLYvalley 920M-38/218 Corrugated sheet

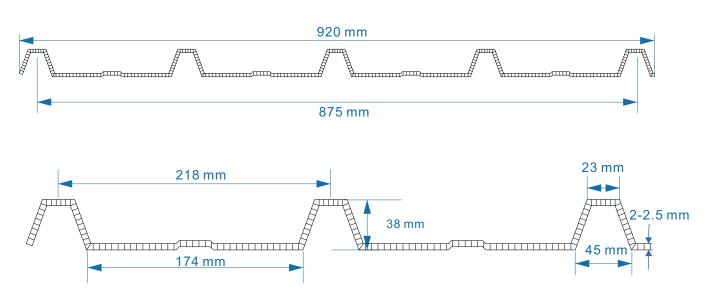

DESCREPTION

Made by 100% virgin Bayer material and 50 micro-meter UV layer, Polyvalley multi-wall corrugated sheet offers ten-year quality warranty against breakage and yellowing. It adopts two-wall R structure and can get very high light transmit (around 88%). With very small vertical bar distance, it can get a very good strength. And during installation, the connection part of two sheets can be overlapped perfectly to avoid water permeation.

Polyvalley offers many different kinds of corrugated sheets. Customized corrugation is also available. You are always welcomed to contact us for more information at any time.

TECHNICAL SPECIFICATION AND FEATURES	
THICKNESS:	2-2.5mm
TOTAL WIDTH:	920mm±5
USEFUL WIDTH:	875mm±5
WAVE HEIGHT:	38mm
WAVE PITCH:	218mm
END SEALING:	Hot melt sealing is possible
LIGHT TRANSMISSION:	Clear 85%±3; Opal 70%±3; Green 60%±3
THERMAL INSULATION:	U=4.5 W/m²K
FLAMMABILITY:	B1
UV COATING:	50µm one side (two side is optional)
APPLICATION:	FLAT ROOF CURVED ROOF BENDING DIAMETER ROSS SM





ADD:No.2 Hongwang road Polyvalley technology park,

Wuqing Tianjin, China

TEL: (+86)-22-5967-2888 FAX: (+86)-22-5967-3666

Hotline: (+86)400 086 3628