


POLYvalley

1100S-26/112 Corrugated sheet

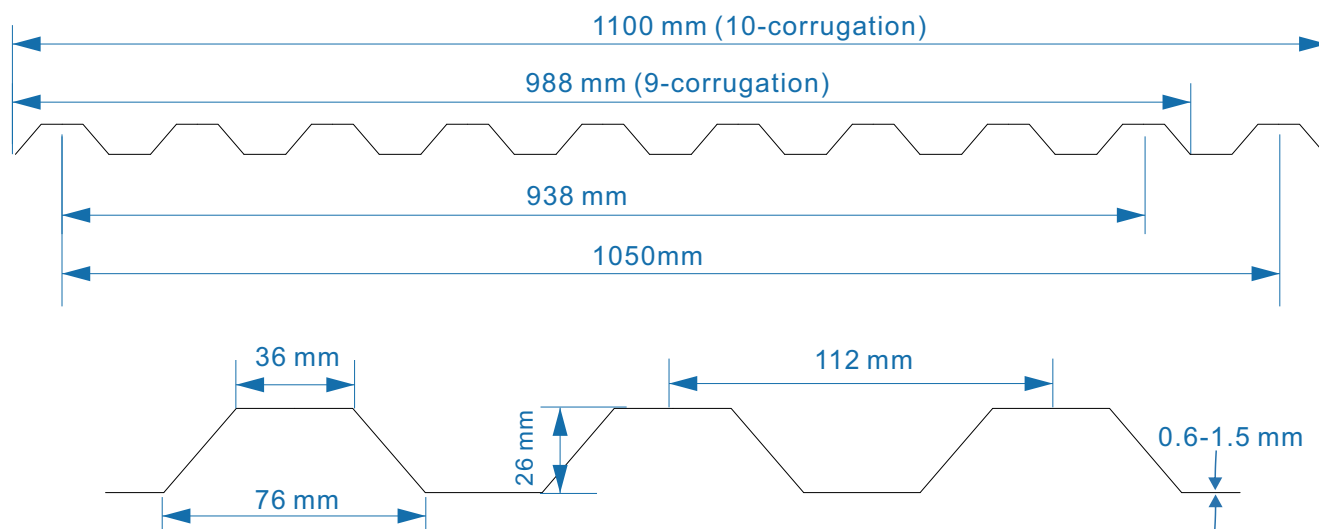

DESCRIPTION


Made by 100% virgin Bayer material and 50 micro-meter UV layer, Polyvalley solid corrugated sheet offers ten-year quality warranty against breakage and yellowing. It owns very high light transmission (around 92%), very suitable for skylight, greenhouse etc. Except easy and lower installation cost, the connection part of two sheets can be overlapped perfectly to avoid water permeation.

Polyvalley offers many different kinds of corrugated sheets. Customized corrugation is also available. You are always welcomed to contact us for more information at any time.

TECHNICAL SPECIFICATION AND FEATURES

THICKNESS:	0.65-1.5mm
TOTAL WIDTH:	1100mm±5
USEFUL WIDTH:	1050mm±5
WAVE HEIGHT:	26mm
WAVE PITCH:	112mm
LENGTH:	No limited (Customized)
LIGHT TRANSMISSION:	Clear 90%±3; Opal 75%±3; Green 65%±3
THERMAL INSULATION:	U=6.5 W/m²K
FLAMMABILITY:	B1
UV COATING:	50µm one side (two side is optional)

APPLICATION:



板谷科技
POLYVALLEY
让生活更自然

ADD: No.2 Hongwang road Polyvalley technology park,
Wuqing Tianjin, China


TEL: (+86)-22-5967-2888 FAX: (+86)-22-5967-3666

Hotline: (+86)400 086 3628

Email: sales@polyvalley.com website: www.polyvalley.com

POLYvalley

1070S-23/146 Corrugated sheet

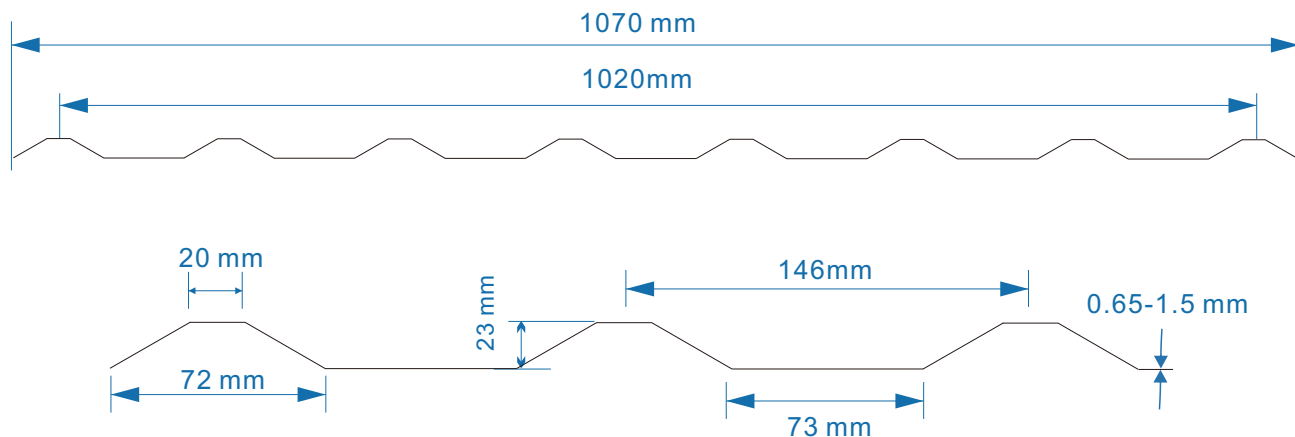

DESCRIPTION


Made by 100% virgin Bayer material and 50 micro-meter UV layer, Polyvalley solid corrugated sheet offers ten-year quality warranty against breakage and yellowing. It owns very high light transmission (around 92%), very suitable for skylight, greenhouse etc. Except easy and lower installation cost, the connection part of two sheets can be overlapped perfectly to avoid water permeation.

Polyvalley offers many different kinds of corrugated sheets. Customized corrugation is also available. You are always welcomed to contact us for more information at any time.

TECHNICAL SPECIFICATION AND FEATURES

THICKNESS:	0.65-1.5mm
TOTAL WIDTH:	1070mm±5
USEFUL WIDTH:	1020mm±5
WAVE HEIGHT:	23mm
WAVE PITCH:	146mm
LENGTH:	No limited (Customized)
LIGHT TRANSMISSION:	Clear 90%±3; Opal 75%±3; Green 65%±3
THERMAL INSULATION:	U=6.5 W/m²K
FLAMMABILITY:	B1
UV COATING:	50µm one side (two side is optional)

APPLICATION:



板谷科技
POLYVALLEY
让生活更自然

ADD: No.2 Hongwang road Polyvalley technology park,
Wuqing Tianjin, China


TEL: (+86)-22-5967-2888 FAX: (+86)-22-5967-3666

Hotline: (+86)400 086 3628

Email: sales@polyvalley.com website: www.polyvalley.com

POLYvalley

1216S-18/76 Corrugated sheet

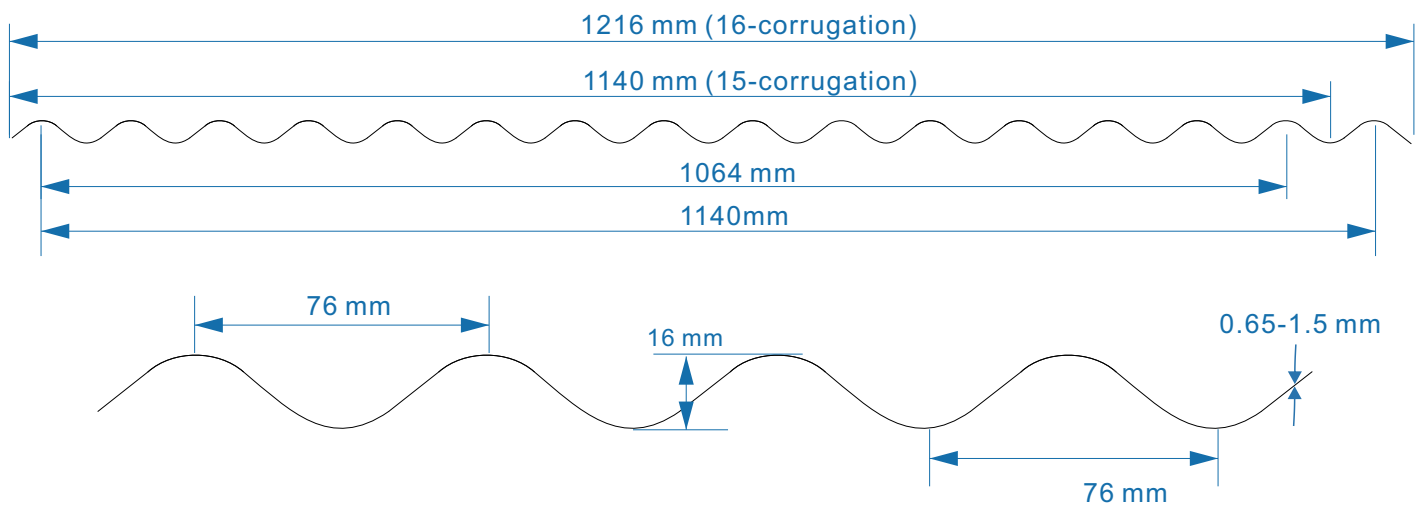

DESCRIPTION


Made by 100% virgin Bayer material and 50 micro-meter UV layer, Polyvalley solid corrugated sheet offers ten-year quality warranty against breakage and yellowing. It owns very high light transmission (around 92%), very suitable for skylight, greenhouse etc. Except easy and lower installation cost, the connection part of two sheets can be overlapped perfectly to avoid water permeation.

Polyvalley offers many different kinds of corrugated sheets. Customized corrugation is also available. You are always welcomed to contact us for more information at any time.

TECHNICAL SPECIFICATION AND FEATURES

THICKNESS:	0.65-1.5mm
TOTAL WIDTH:	1190mm±5
USEFUL WIDTH:	1114mm±5
WAVE HEIGHT:	18mm
WAVE PITCH:	76mm
LENGTH:	No limited (Customized)
LIGHT TRANSMISSION:	Clear 90%±3; Opal 75%±3; Green 65%±3
THERMAL INSULATION:	U=6.5 W/m²K
FLAMMABILITY:	B1
UV COATING:	50µm one side (two side is optional)

APPLICATION:



板谷科技
POLYVALLEY
让生活更自然

ADD: No.2 Hongwang road Polyvalley technology park,
Wuqing Tianjin, China


TEL: (+86)-22-5967-2888 FAX: (+86)-22-5967-3666

Hotline: (+86)400 086 3628

Email: sales@polyvalley.com website: www.polyvalley.com

POLYvalley

1080S-28/203 Corrugated sheet

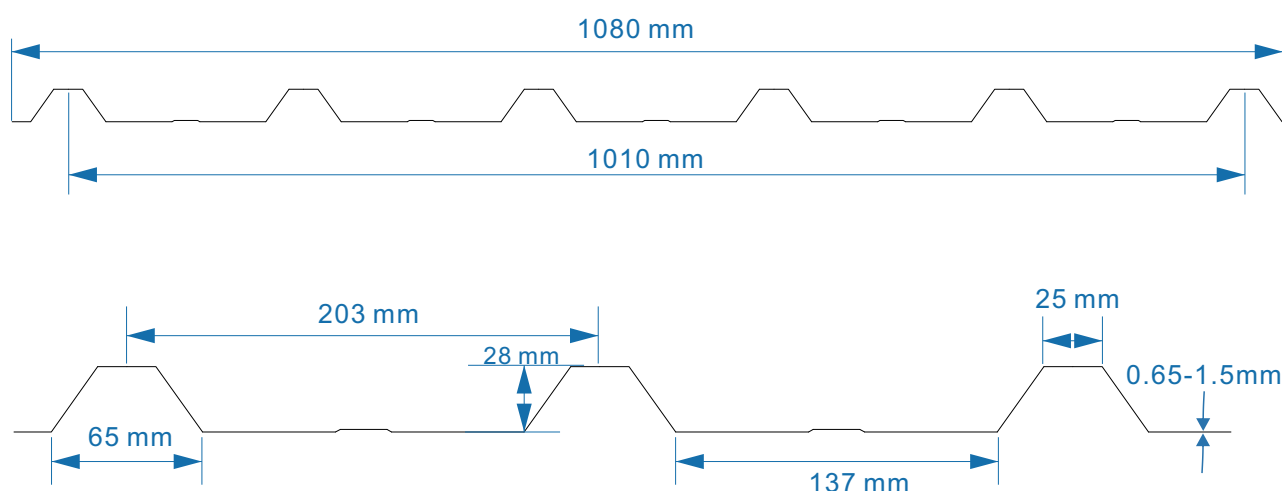

DESCRIPTION


Made by 100% virgin Bayer material and 50 micro-meter UV layer, Polyvalley solid corrugated sheet offers ten-year quality warranty against breakage and yellowing. It owns very high light transmission (around 92%), very suitable for skylight, greenhouse etc. Except easy and lower installation cost, the connection part of two sheets can be overlapped perfectly to avoid water permeation.

Polyvalley offers many different kinds of corrugated sheets. Customized corrugation is also available. You are always welcomed to contact us for more information at any time.

TECHNICAL SPECIFICATION AND FEATURES

THICKNESS:	0.65-1.5mm
TOTAL WIDTH:	1080mm±5
USEFUL WIDTH:	1010mm±5
WAVE HEIGHT:	28mm
WAVE PITCH:	203mm
LENGTH:	No limited (Customized)
LIGHT TRANSMISSION:	Clear 90%±3; Opal 75%±3; Green 65%±3
THERMAL INSULATION:	U=6.5 W/m²K
FLAMMABILITY:	B1
UV COATING:	50µm one side (two side is optional)

APPLICATION:



板谷科技
POLYVALLEY
让生活更自然

ADD: No.2 Hongwang road Polyvalley technology park,
Wuqing Tianjin, China


TEL: (+86)-22-5967-2888 FAX: (+86)-22-5967-3666

Hotline: (+86)400 086 3628

Email: sales@polyvalley.com website: www.polyvalley.com

POLYvalley

1110S-28/210 Corrugated sheet

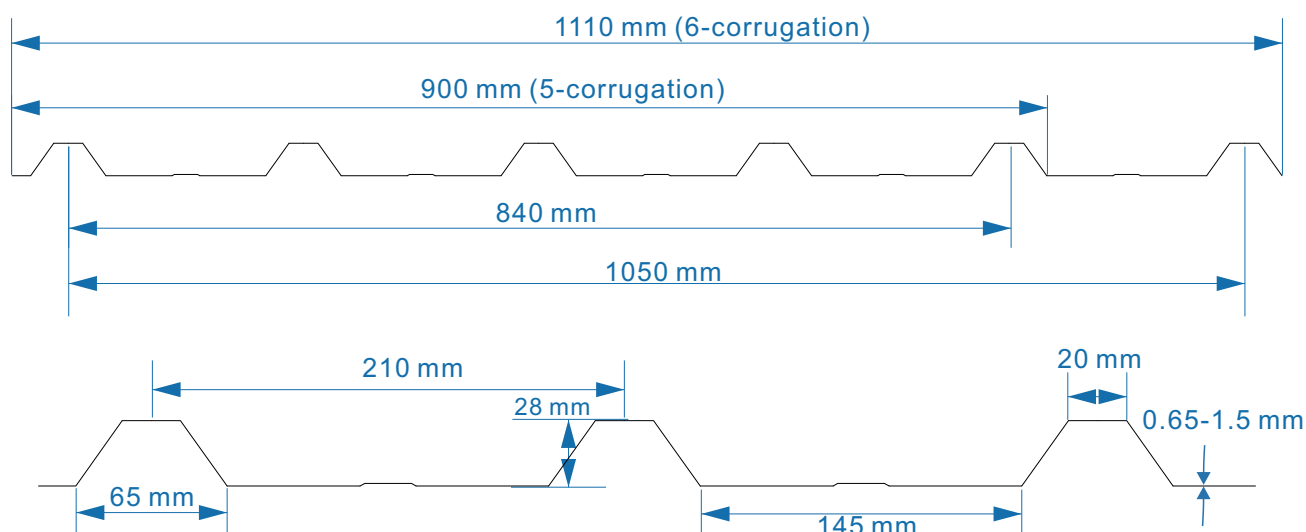

DESCRIPTION


Made by 100% virgin Bayer material and 50 micro-meter UV layer, Polyvalley solid corrugated sheet offers ten-year quality warranty against breakage and yellowing. It owns very high light transmission (around 92%), very suitable for skylight, greenhouse etc. Except easy and lower installation cost, the connection part of two sheets can be overlapped perfectly to avoid water permeation.

Polyvalley offers many different kinds of corrugated sheets. Customized corrugation is also available. You are always welcomed to contact us for more information at any time.

TECHNICAL SPECIFICATION AND FEATURES

THICKNESS:	0.65-1.5mm
TOTAL WIDTH:	1110mm±5
USEFUL WIDTH:	1050mm±5
WAVE HEIGHT:	28mm
WAVE PITCH:	203mm
LENGTH:	No limited (Customized)
LIGHT TRANSMISSION:	Clear 90%±3; Opal 75%±3; Green 65%±3
THERMAL INSULATION:	U=6.5 W/m²K
FLAMMABILITY:	B1
UV COATING:	50µm one side (two side is optional)

APPLICATION:



板谷科技
POLYVALLEY
让生活更自然

ADD: No.2 Hongwang road Polyvalley technology park,
Wuqing Tianjin, China


TEL: (+86)-22-5967-2888 FAX: (+86)-22-5967-3666

Hotline: (+86)400 086 3628

Email: sales@polyvalley.com website: www.polyvalley.com

POLYvalley

1140M-38/218 Corrugated sheet

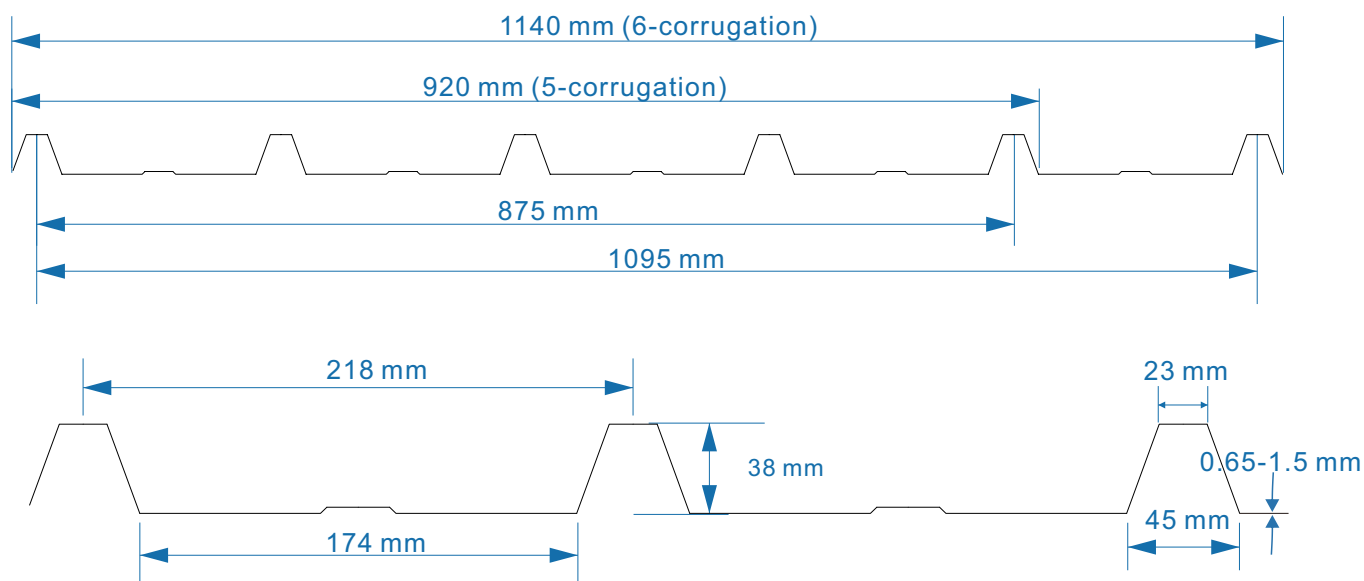

DESCRIPTION


Made by 100% virgin Bayer material and 50 micro-meter UV layer, Polyvalley multi-wall corrugated sheet offers ten-year quality warranty against breakage and yellowing. It adopts two-wall R structure and can get very high light transmit (around 88%). With very small vertical bar distance, it can get a very good strength. And during installation, the connection part of two sheets can be overlapped perfectly to avoid water permeation.

Polyvalley offers many different kinds of corrugated sheets. Customized corrugation is also available. You are always welcomed to contact us for more information at any time.

TECHNICAL SPECIFICATION AND FEATURES

THICKNESS:	0.65-1.5mm
TOTAL WIDTH:	1440mm±5
USEFUL WIDTH:	1095mm±5
WAVE HEIGHT:	28mm
WAVE PITCH:	203mm
END SEALING:	Hot melt sealing is possible
LIGHT TRANSMISSION:	Clear 85%±3; Opal 70%±3; Green 60%±3
THERMAL INSULATION:	U=4.5 W/m²K
FLAMMABILITY:	B1
UV COATING:	50µm one side (two side is optional)

APPLICATION:



板谷科技
POLYVALLEY
让生活更自然

ADD: No.2 Hongwang road Polyvalley technology park,
Wuqing Tianjin, China

TEL: (+86)-22-5967-2888 FAX: (+86)-22-5967-3666

Hotline: (+86)400 086 3628

Email: sales@polyvalley.com website: www.polyvalley.com